


Introduction



ERC1206 dimming receiver controller can pair with kinetic switch to control light on/off/dimming. The ERC1206 has WiFi module, so can use mobile APP to remote control, and Amazon Alexa voice control.

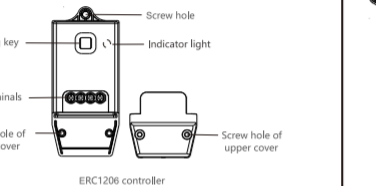

- Product Parameters
- Product Model: ERC1206
- Product Name: Single dimming controller
- Working Temperature: -20 ~ +55°C
- Control Distance: 50m(outdoor), 30m(indoor)
- Sensitivity: -110dBm
- Voltage Range: 12-24V MAX 9A
- Rated Power: LED 108W
- Dimensions: L98*W44*H31mm
- Wireless Communication: WIFI 2.4G & RF 433Mhz
- Storage Capacity: Maximum 10 switch keys can be paired

Notice: The effective distance is measured by EBELONG laboratory. In the actual use, it will vary due to environment changes.


Connection and Installation

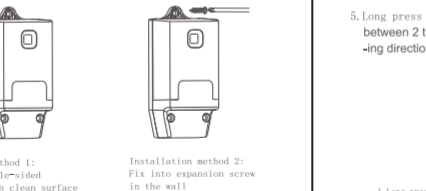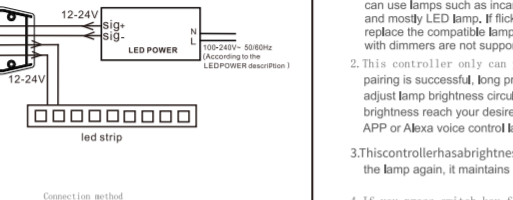

Instruction of Dimming Function


- The ERC1206 controller can output a 12-24V signal to realize the switch and dimming control of the lamp. So can use lamps such as incandescent lamp, tungsten lamp and mostly LED lamp. If flickering occurs during dimming, replace the compatible lamp. Segmented dimmers and lamps with dimmers are not supported.
- This controller only can pair with push button switch: after pairing is successful, long press the push button switch can adjust lamp brightness circularly. Release the switch when brightness reach your desired percentage. Also can use mobile APP or Alexa voice control lamp brightness.
- This controller has a brightness memory function. When turn on the lamp again, it maintains the last brightness of lamp.

- If you press switch key for long time, the controller dims from the darkest to brightest for 2 cycles, and will stop dimming when reaching maximum brightness after 2 cycles.
- Long press to adjust the lamp brightness, if the interval time between 2 times of long press is less than 1 second, the dimming direction (dim or brighten) will be reversed.



- Long press dimming, if this time is brighten direction, release and long press again within 1 second, it will change to dim direction.
- Long press dimming, if this time is dim direction, release and long press again within 1 second, it will change to brighten direction.

Combination Method

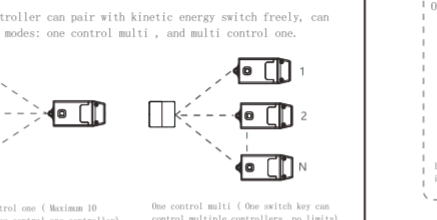


Ordinary Paring Method

- Connect the controller's input to the power supply, press the controller "pairing key" around 3 seconds, release when indicator light flash slowly (flash 1 time per second).
- Press the selected kinetic energy switch once (Do not press several times continuously), then indicator light is off, means the pairing is successful.
- If need to pair with multiple switches, repeat the above procedure. Please note one controller can be paired with maximum 10 switches.
- After the pairing is successful, so can press the kinetic switch to control controller. In the case of no connected loads, you can know controller status by the on/off indicator light.


Directional Paring (not common use)

- In order to meet the user's usage habit of switch and to ensure the synchronization of one control multi mode, so we define the directional pairing mode. Directional pairing only support 2 keys or 6 keys push button switch.
- Connect the controller's input to the power supply, press the controller "pairing key" for around 3 seconds, release when indicator light flash slowly (flash 1 time per second).
 - Press push button switch left or right key four times (within 0.5 second), then the indicator light goes off, which means the pairing is successful.
 - After pairing is successful, left and right key of push button switch as a group, press the left key is OFF and the right key is ON, long press the left key is dimming and right key is brighten.

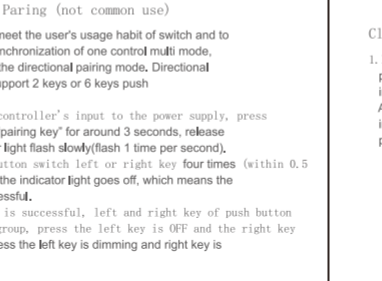


Clear paring

- If you need to clear paring of switch and controller, long press the controller "pairing key" for around 12 seconds, the indicator light will flash from slowly - quickly - stay still - off. After indicator light is off, which means that all paired switch information is cleared. If you need use this controller again, please pair again.

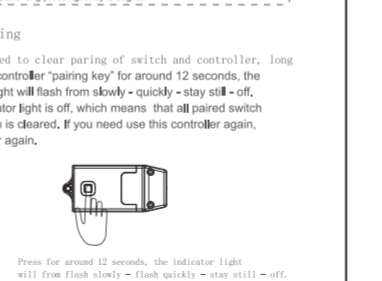


Connect WIFI method

- Use your mobile phone to download APP and follow the prompts to register your account in the APP.
- Power on the controller, and confirm the indicator light is flash quickly (twice per second). If the indicator light is not flash quickly, keep pressing the "pairing key" around 10 seconds, the indicator light will flash from slow - fast - stay still, release when the indicator light is stay still. Then wait for 3 seconds, the indicator light will flash quickly (twice per second).
- Click "Add device" in the APP, and select model "Single dimming controller".

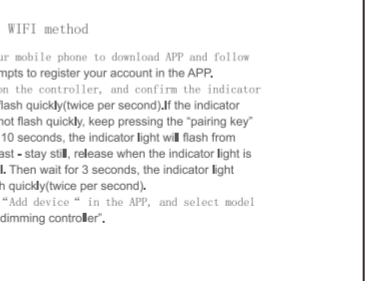


APP download

This controller can use mobile APP to remote control. Search " Kinetic switch" in App store or Google Play and download, or scan below QR code download.

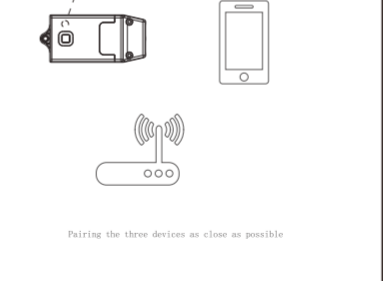

Dimming Function

Dimming function is enabled for controller by default. If you need to disable the dimming function of the controller, you can operate as follows: long press the controller pairing button for 7 seconds, the indicator light will changes from flashing slowly to flash quickly, and move your hand when flashing quickly. At this time, the indicator light will flashes once in 2 seconds, which means that dimming function is disabled. If you need to enable the dimming function again, repeat the above steps.

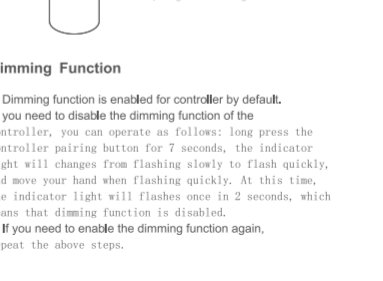

Troubleshooting

- WIFI failed internet pairing
Troubleshooting method: Please confirm the indicator light is blink rapidly (twice per second); If not blink rapidly, please set the indicator light to blink rapidly according to connect WIFI method.
Let router, controller and mobile phone as close as possible (within 5 meters).
- The controller is off line in APP
Troubleshooting method: It may be the router connections quantity reaches the upper limit. Common router can connect maximum 15 pcs devices, please upgrade router and close devices which are not needed.
- Controller cannot work after it is powered on
Troubleshooting method: If the loads exceed the rated current or short circuit, the fuse may blow. Please first exclude the short circuit, and confirm whether the load power is beyond the maximum support range.
- When the load is LED lamp, the lamp will flash during dimming
Troubleshooting method: Please check the parameters of the LED lamp to confirm that it can support Reverse Phase dimming or Forward Phase dimming. If it does not support, please replace lamp supports dimming function mentioned.

Certificate / Inspected

Copyright © 2012-2020 ShenZhen Ebelong Technology Co., Ltd. All rights reserved. The Controller in this manual is produced by ShenZhen Ebelong Technology Co., Ltd. The product specifications and information mentioned in this manual are for reference only. The content may be updated please pay attention to the official website. Unless specially stated all statements in this manual do not constitute any form of commitment. No part of this manual may be copied, reproduced or translated without the written permission of ShenZhen Ebelong Technology Co., Ltd Do not distribute goods or use them for commercial profit in any form or by any means (electronic, mechanical photocopying, recording, etc.)

ShenZhen Ebelong Technology Co., Ltd.
Building No.2, Hengmingzhu Shajing Industrial Park, Xiangxing Road, Bao'an District, Shenzhen, Guangdong, China, 518104
Tel: 0755-2788-8578
400-0000-362

Copyright © 2012-2020
ShenZhen Ebelong Technology Co., Ltd.

